

UJF-7151 plusII Color Glossy Print Guide

This guide describes how to print color ink to create a glossy finish using the UJF-7151 plusII.
Please read this manual carefully and use it correctly.

Note

- It is strictly prohibited to write or copy a part or whole of this document without our approval.
- This document has been carefully prepared for your easy understanding, however, please do not hesitate to contact a distributor in your district or our office if you have any inquiry.
- Description contained in this document are subject to change without notice for improvement.
- Copying the Mimaki Engineering Co. Ltd. software described in this guide to other disks (except for backup purposes) or loading it to memory except for the purpose of running it, is strictly prohibited.
- Due to improvement or change of software, the description of this document could be partially different in specification, for which your understanding is requested.
- With the exception of what is provided for in the warranty provisions of MIMAKI ENGINEERING CO., LTD., we do not assume any liability against the damages (including but not limited to the loss of profit, indirect damage, special damage or other monetary damages) arisen out of the use or failure to use of this product. The same shall also apply to the case even if MIMAKI ENGINEERING CO., LTD. had been notified of the possibility of arising damages in advance. As an example, we shall not be liable for any loss of the media made using this product or indirect damages caused by the product made using this media.
- You can also download the latest operation manual from our website.

Notations used in this document

- Items and buttons displayed in menus and on screens are marked with square brackets ([]) as in [File].

Symbols



- This symbol indicates important information for using this product.



- This symbol indicates useful information.

RasterLink is the trademarks or registered trademarks of MIMAKI ENGINEERING CO., LTD. in Japan and in other countries.

Adobe, the Adobe logo, Acrobat, Illustrator, Photoshop, and PostScript are the trademarks or registered trademarks of Adobe Inc. in the United States and other countries.

CorelDRAW is a trademark or registered trademark of Corel Corporation in Canada, the United States and other countries, and its affiliates.

Microsoft and Windows are trademarks or registered trademarks of Microsoft Corporation of the United States and other countries.

Apple and Macintosh are trademarks or registered trademarks of Apple Inc. of the United States and other countries.

Other company and product names mentioned herein are the trademarks or registered trademarks of the respective companies in Japan and in other countries.

Applicable environmentApplicable environment

Printer	UJF-7151 plusII	
Ink	LH-100	ELH-100
Mimaki Driver	Ver.5.5.0 or later	Ver.5.9.14 or later
RIP	RasterLink7 Ver.2.0.0 or later	RasterLink7 Ver.3.3.2.1 or later

Table of Contents

Note	1
Applicable environmentApplicable environment	2
Setting the printer	3
Set the MAPS4 setting to "AUTO"	3
Turn the ionizer (option) setting on	4
Set the logical seek setting to "OFF"	4
Color glossy printing benefits and printing conditions	5
Benefits	5
Printing procedure	6
UV Mode setting	6
Printing condition setting	8
Printing	8

Setting the printer

Before printing with this Guide, carry out setting of the printer as follows.

Set the MAPS4 setting to "AUTO"

1. Turn on the printer's power.

- Wait until <Local> is displayed on the panel.



- If the power is already on, have the panel display <Local>.

2. Select [UV MODE] on the panel, as follows:

- (1) With "Local" displayed, press the **FUNC1** key.
- (2) Use the **▲**, **▼** key to select [SETUP], then press the **ENTER** key.
- (3) Use the **▲**, **▼** key to select [UV MODE], then press the **ENTER** key.
- (4) Use the **▲**, **▼** key to select [ON].
- (5) Press the **ENTER** key.
- (6) Return to [SETUP], by pressing the **END/POWER** key just once.

3. Select [MAPS4] on the panel, as follows:

- (1) Make sure that [SETUP] is selected.
- (2) Use the **▲**, **▼** key to select [MAPS4], then press the **ENTER** key.

4. Select "AUTO" for [MAPS4], as follows:

- (1) Use the **▲**, **▼** key to select "AUTO".
- (2) Press the **ENTER** key.

MAPS4
: AUTO

5. Return to "Local", by pressing the **END/POWER** key several times.

Turn the ionizer (option) setting on

If an ionizer is connected, make sure this setting is turned on.
When left off, the mist may degrade the image quality.

1. Select [ionizer] on the panel, as follows:

- (1) With "Local" displayed, press the **FUNC1** key.
- (2) Use the **▲**, **▼** key to select [MACHINE SETUP], then press the **ENTER** key.
- (3) Use the **▲**, **▼** key to select [ionizer], then press the **ENTER** key.

2. Select "ON" for [ionizer], as follows:

- (1) Use the **▲**, **▼** key to select "ON".
- (2) Press the **ENTER** key.

3. Return to "Local", by pressing the **END/POWER** key several times.

Set the logical seek setting to "OFF"

To stabilize the image quality, set the logical seek setting to "OFF".
However, the print time will be longer than when logical seek is set to "ON".

1. Select [logical seek] on the panel, as follows:

- (1) With "Local" displayed, press the **FUNC1** key.
- (2) Use the **▲**, **▼** key to select [SETUP], then press the **ENTER** key.
- (3) Use the **▲**, **▼** key to select [logical seek], then press the **ENTER** key.

2. Select "OFF" for [logical seek], as follows:

- (1) Use the **▲**, **▼** key to select "OFF".
- (2) Press the **ENTER** key.

3. Return to "Local", by pressing the **END/POWER** key several times.

Color glossy printing benefits and printing conditions

Benefits

Color glossy printing leaves a glossy finish on the surface of the color ink.



The following factors may prevent the achievement of an ideal gloss:

- Density of the color image being printed
- Media
- Color adjustment settings (especially those reducing density)
- Illuminance settings (especially settings that make the illuminance stronger than 100)
[P.5 "About the illuminance settings"](#)

Use the following print settings for color glossy printing:

Resolution
600 × 900 VD*
1,200 × 1,200 VD

* Adhesion may be reduced when printing color glossy print jobs over white ink.


● About the illuminance settings

Depending on the base material used, sufficient adhesion and curing may not be achieved. It is recommended to check adhesion and curability under the desired illuminance and printing conditions in advance.

Printing procedure


UV Mode setting

1. Select the job forming the base from the job list.
2. Click [Setup] for [Job Attribute] on the [Properties] screen.
3. Select [Glossy Print] for UV Mode.

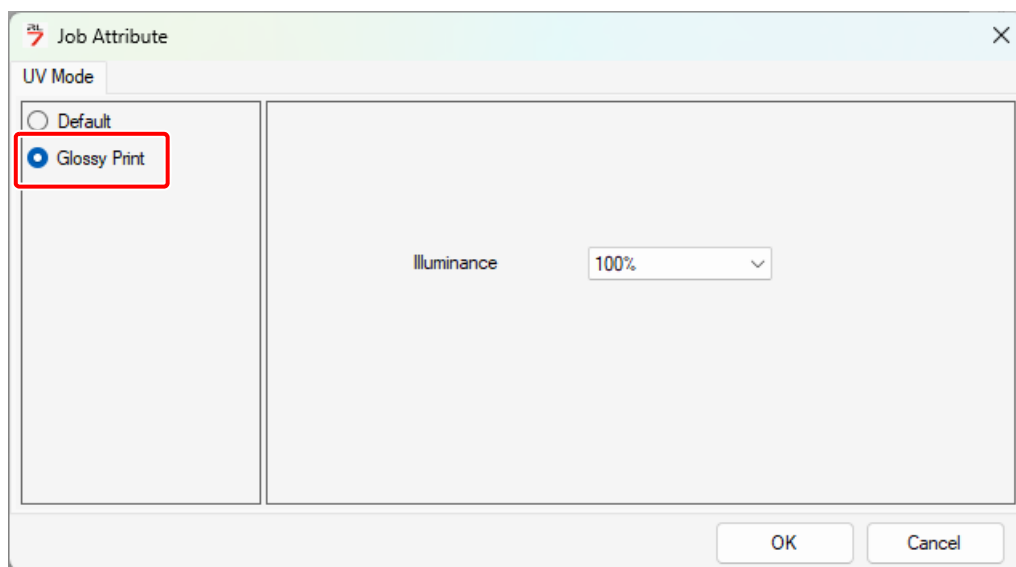


4. Select the illuminance.

- If sufficient glossiness cannot be obtained at 100% illuminance, it may be improved by reducing the illuminance.
However, adhesion and curability may be reduced.
- If adhesion or curing is insufficient at 100% illumination, it may be improved by increasing the illumination.
However, glossiness may be reduced.

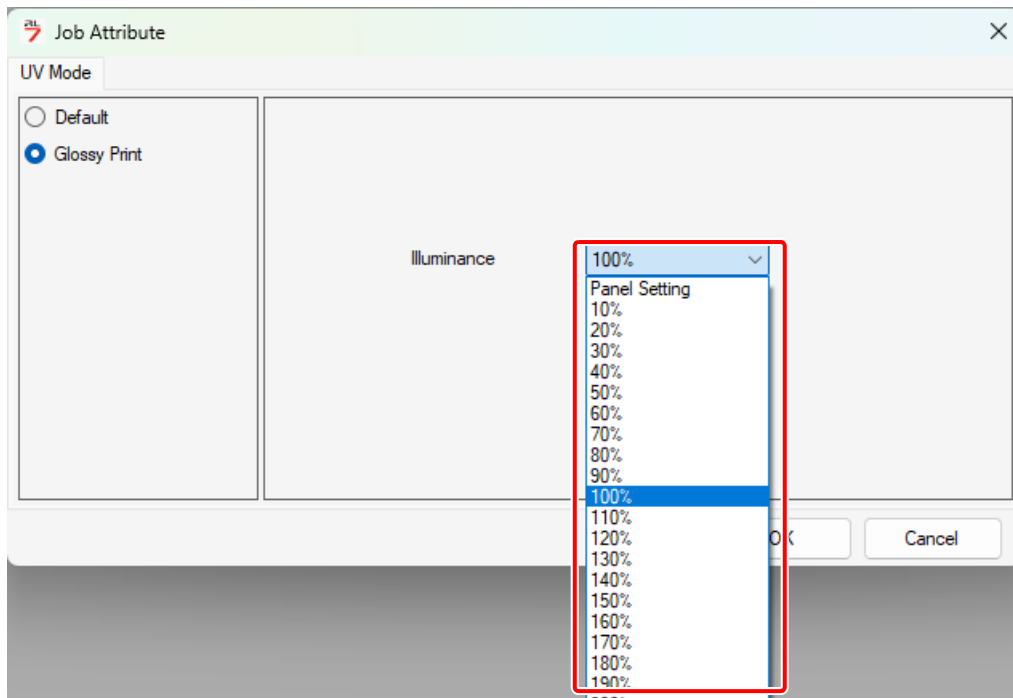

5. The attribute in [Job List] changes from [Color] to [Color (Glossy)].

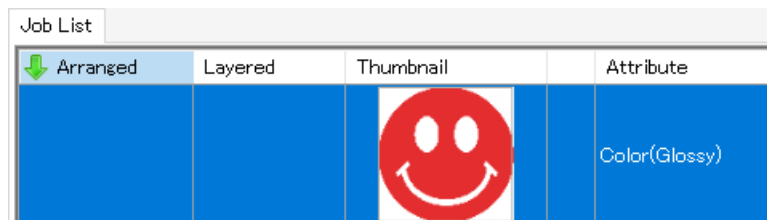

Important!

- Jobs using color glossy print cannot be replaced with special color ink (white, silver, or primer) on the [Color Replacement] screen.
- Color glossy print jobs cannot be printed using the same feed as jobs with other attributes (such as color or white plates).

Printing condition setting

1. Select the required job from the job list.


- Select [Print Condition]  from the function icon.

2. Select [Color Glossy Print] for [Specifying display conditions for device profiles].

- You can now select settings that permit color glossy printing.



3. Select the media and resolution.

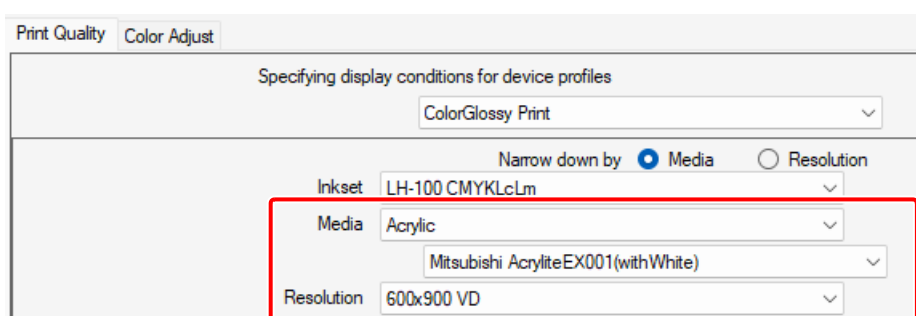

4. Set the printing conditions.

- Refer to P.5 "Color glossy printing benefits and printing conditions".

Printing

1. Select the required job from the job list.

2. Click the [Execute] icon.

3. Click [Start].

